




20" DISPOSABLE SERIES CARBON BLOCK CARTRIDGE

ECONOMICALLY PRICED TASTE AND ODOR REDUCING FILTRATION

EPMDRS10-2: 20" DS Carbon Block Replacement Cartridge

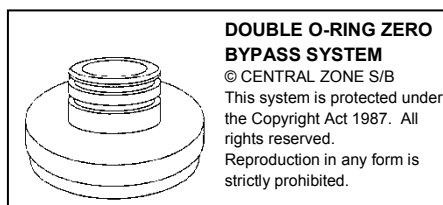

DOUBLE O-RING ZERO BYPASS SYSTEM
© CENTRAL ZONE S/B
This system is protected under the Copyright Act 1987. All rights reserved. Reproduction in any form is strictly prohibited.

EPMDRS10-2 cartridge utilizes the Pentair EPM Series Modified Epsilon Carbon Block technology as the filtering medium.

Pentair EPM Series cartridges are manufactured using a process that yields a cartridge with a nominal 10 micron filtration rating, high porosity and chlorine taste & odor reduction. The high porosity design helps prevent the cartridge from plugging before its adsorption capability is exhausted, maximizing the utilization of the carbon while maintaining low pressure drop.

These cartridges are protected by an outer wrap designed to significantly increase the useful life of the cartridge by trapping sediment that typically plugs carbon block cartridges.

An economical price makes this cartridge suitable for taste, odor and chlorine taste & odor reduction, as well as sediment filtration.

bubble's versatile Disposable Series Cartridges with Double O-Ring design end-caps ensure a ZERO BYPASS effect for optimum performance and sanitary quick-change design avoids coming in contact with contaminations on the cartridge surface during change.

WARNING: For Drinking Water Applications, do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

FEATURES & BENEFITS

- Nominal 10 micron rating*
- Enhanced dirt holding capacity for extended cartridge life*
- Lowest pressure drop
- Bad taste and odor, and chlorine taste & odor reduction*
- Economically priced

* Based on manufacturer's internal testing.

SPECIFICATIONS

Casing Material: Polypropylene

O-ring: NBR

Filter Media: Bonded PAC

Temperature: 40° F to 180° F (4.4°C to 82.2°C)

Micron Rating: 10 microns (nominal)

Initial ΔP (PSI) @ Flow Rate (GPM)

0.4 psi @ 1.0 gpm (0.03 bar @ 3.8 Lpm)

Chlorine Taste & Odor Reduction @ Flow Rate

6,000 gallon @ 2 gpm (22,700L @ 7.6 Lpm)

Dimensions (OD X H) ± 1 mm

95mm x 516mm

WARRANTY

BUBBLE Division warrants to the original purchaser-consumer of its products that are free from defects in materials and workmanship for a period of one year from the date of purchase. Refer to detailed warranty statement.