

VM65 SPECIFICATION SHEET

EASILY WASHABLE



SPECIFICATIONS

Unit Construction: 304 Stainless Steel
Inlet / Outlet Connections: 3/4"
Max. Operating Pressure: 125 psi
Max. Operating Temperature: 30 °C
Max. Flow Rate : 30gpm (6.8m³/hr)

Overall Height: 39"
Housing Diameter: 7-1/2"

OPTIONAL ACCESSORIES

A. INLET PART

A1. VM S/S Tee
A2. 3/4" Ball Valve
A3. VM S/S Tee
A4. 1/2" Mini Ball Valve
A5. 1/2" Mini Ball Valve
A6. 1/2" BSPM X 1/2" BARB


B. OUTLET PART

B1. VM S/S Tee
B2. 3/4" Ball Valve
B3. 1/2" Mini Ball Valve

C. WATERGUN

D. 10' TUBING

E. PRESSURE GAUGE

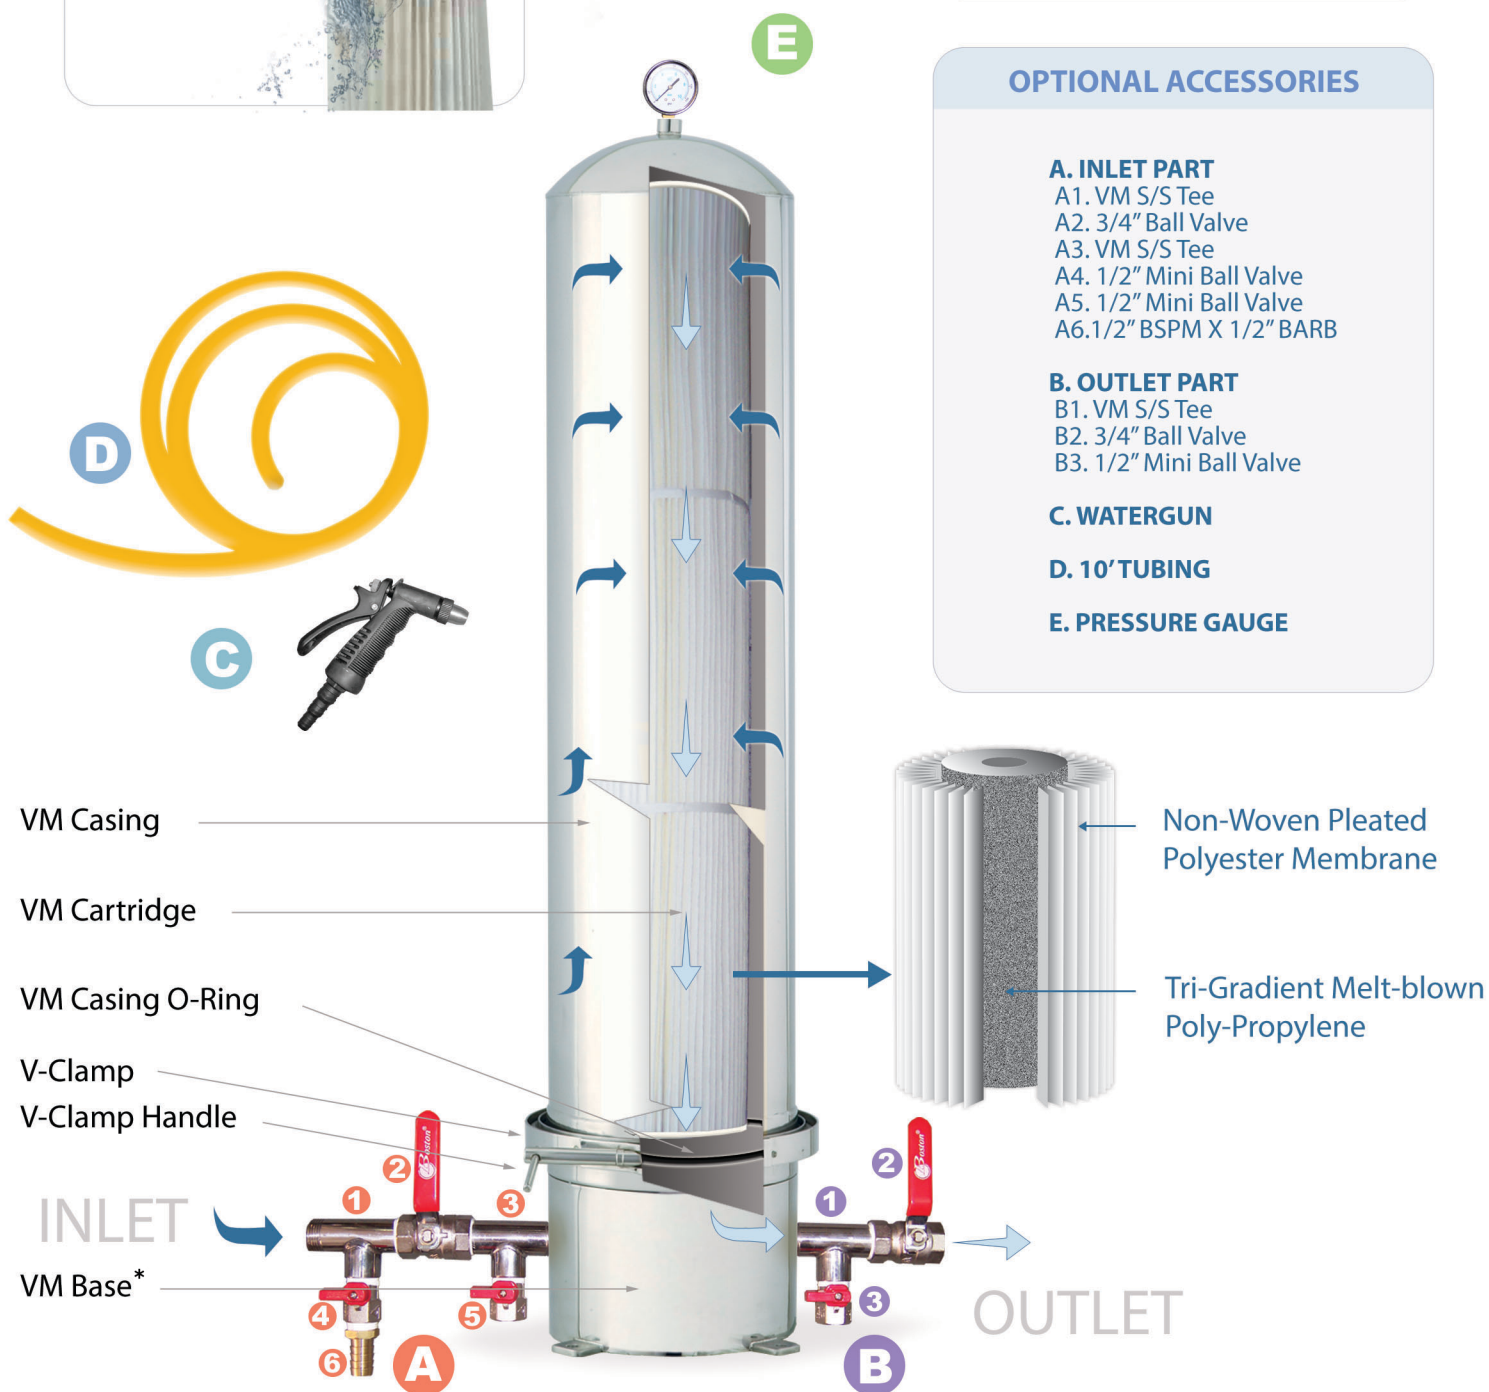

*Actual unit base is slightly different from photo